

Crochet magnétique rond type CM 02

REF 94.02

Aimant neodyme

Grande Force d'Attraction / Construction robuste / Sûre / Efficace


Montage, Assemblage

- . Aimant cylindrique
- . Capotage en acier zingué
- . Avec crochet de suspension

Options



| Reference | Poids en kg | A | B | C | D | E | F | G |
|-----------|-------------|----|-----|----|----|------|---|------|
| 94.02-6 | 0.002 | 6 | 4.5 | M3 | 6 | 11.5 | 7 | 5N |
| 94.02-8 | 0.003 | 8 | 4.5 | M3 | 6 | 11.5 | 7 | 13N |
| 94.02-10 | 0.004 | 10 | 4.5 | M3 | 6 | 11.5 | 7 | 25N |
| 94.02-13 | 0.005 | 13 | 4.5 | M3 | 6 | 11.5 | 7 | 60N |
| 94.02-16 | 0.007 | 16 | 4.5 | M4 | 6 | 11.5 | 7 | 95N |
| 94.02-20 | 0.016 | 20 | 6 | M4 | 8 | 13 | 7 | 140N |
| 94.02-25 | 0.027 | 25 | 7 | M4 | 8 | 14 | 7 | 200N |
| 94.02-32 | 0.045 | 32 | 7 | M5 | 10 | 15.5 | 8 | 350N |

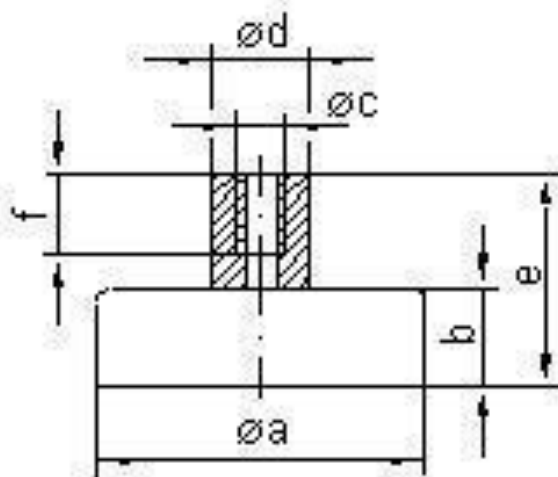

G= Force - Force - Kraft